

# Automotive

## PROFESSIONAL GRADE FEATURES



**ADJUSTABLE SOLID RUBBER HOSE STOP** for lead length positioning

**VERSATILE GUIDE ARM** adjusts to wall, floor, ceiling & vehicle mounting

**EXTERNAL FLUID PATH WITH MACHINED FROM SOLID BRASS 90° FULL-FLOW NPT SWIVEL** that screws directly on 1" solid steel axle, for simple seal maintenance and fast and easy hose installation

**HIGH QUALITY STEEL CONSTRUCTION** with our durable CPC™ powder coat finish

**HEAVY DUTY SPUN DISCS** with rolled edges for greater strength, made with first of it's kind CNC robotic spin cell


**ENCLOSED FACTORY TUNED AND MATCHED CARTRIDGE-STYLE SPRING MOTOR** for safe and easy maintenance. Models equipped with **EZ-COIL**, Coxreels patented safety system, retracts up to 80% slower than conventional reels

**HEAVY GAUGE 1/4" STEEL BASE & SUPPORT POST** for maximum stability

**DUAL AXLE SUPPORT WITH SUPER HUB™** increased reel strength for more demanding applications  
*Only on SH, MP, HP and T Series*

### POSSIBLE FIELDS OF APPLICATION

- Pneumatic Tools
- Air / Water Services
- Nitrogen Dispensing
- Power Tools
- Light Source
- Tire Services
- Automotive & Fleet Service Center
- Automotive Dealerships

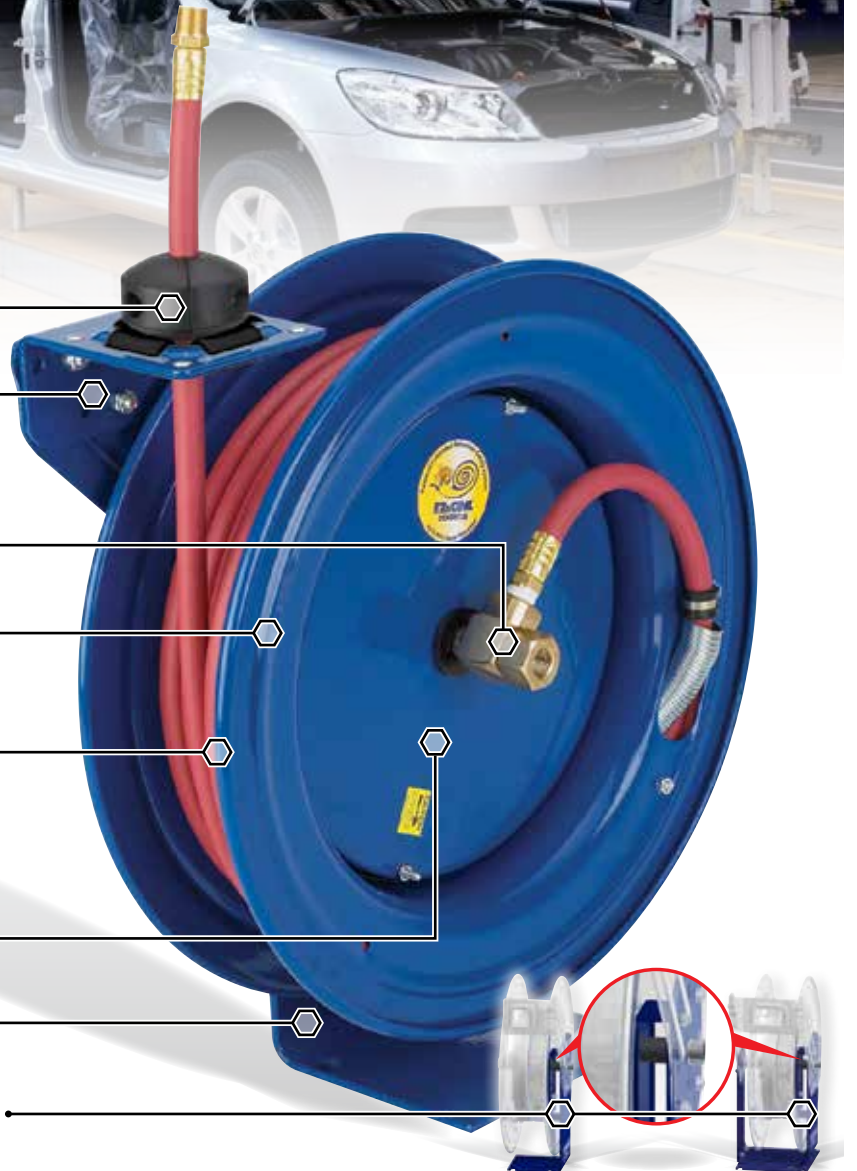

[www.coxreels.com](http://www.coxreels.com)

800.COX.REEL

P: 480.820.6396

F: 480.820.5132

E: [info@coxreels.com](mailto:info@coxreels.com)





## P SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy single pedestal spring driven reel with space saving design facilitates workplace organization
- Available in Medium & High Pressure

MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
P-LP-125	EZ-P-LP-125	1/4"	25	300	27	5 7/8 x 14 7/8 x 13 1/2"
P-LP-150	EZ-P-LP-150	1/4"	50	300	40	6 3/4 x 18 5/8 x 17 1/8"
P-LP-325	EZ-P-LP-325	3/8"	25	300	28	6 1/2 x 14 7/8 x 13 1/2"
P-LP-350	EZ-P-LP-350	3/8"	50	300	43	6 3/4 x 18 5/8 x 17 1/8"
P-LP-425	-	1/2"	25	300	44	7 x 18 5/8 x 17 1/8"
P-LP-450	EZ-P-LP-450	1/2"	50	300	48	7 x 18 5/8 x 17 1/8"



## MP & HP SERIES - EQUIPPED WITH SUPER HUB™

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy single pedestal spring driven reel features Coxreels' exclusive Super Hub™ dual axle support system

MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
MP-N-350	EZ-MP-350	3/8"	50	3,000	65	8 1/4 x 21 1/4 x 19 1/2"
MP-N-450	EZ-MP-450	1/2"	50	2,500	67	8 3/4 x 25 1/2 x 19 1/2"
HP-N-150	EZ-HP-150	1/4"	50	5,000	64	8 3/4 x 25 1/2 x 19 1/2"
HP-N-350	EZ-HP-350	3/8"	50	4,000	65	9 1/4 x 25 1/2 x 19 1/2"



## SG SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Side mount design for vertical flat surface, cabinet or enclosed space mounts.

MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
SG13-L325	EZ-SG13-L325	3/8"	25	300	26	6 3/4 x 15 1/2 x 13 1/2"
SG17-L350	EZ-SG17-L350	3/8"	50	300	40	6 3/4 x 19 1/2 x 17"
SG17-L430	EZ-SG17-L430	1/2"	30	300	42	6 3/4 x 19 1/2 x 17"
SG19-L450	EZ-SG19-L450	1/2"	50	300	52	8 1/2 x 22 x 19 1/2"



## ALUMI-PRO® SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- Industrial strength CPC™ powder coated aluminium construction

MODEL	I.D.	FT.	PSI	APRX. LBS.	W x H x L
P-LP-325-AL	3/8"	25	300	19	6 1/2 x 14 7/8 x 13 1/2"
P-LP-350-AL	3/8"	50	300	27	6 3/4 x 18 5/8 x 17 1/8"
P-LP-425-AL	1/2"	25	300	29	7 x 18 5/8 x 17 1/8"



## NITRO-PRO® SERIES

- Nitrogen quality seals in the machined from solid brass 90° full-flow NPT swivel
- Designed for nitrogen tire inflation systems

MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
P-NP-350	EZ-P-NP-350	3/8"	50	300	43	6 3/4 x 18 5/8 x 17 1/8"



## C SERIES - AIR / ELECTRIC - DUAL PURPOSE REELS

- Compact two spring driven reel assembly for air/electric applications, each reel operates independently
- Available in Air / Water - Dual Purpose Hose Reels
- Choice of electrical accessory\*

MODEL	ACCESSORY	AWG / NO. COND.	CORD FT.	AMPS	APRX. LBS.	W x H x L
C-L350-5016-A	Single Industrial Receptacle	16 / 3	50	13	94	16 x 18 5/8 x 17"
C-L350-5012-B	Quad Receptacle	12 / 3	50	20	97	16 x 18 5/8 x 17"
C-L350-5016-C	Fluorescent Tube	16 / 3	50	0.3	94	16 x 18 5/8 x 17"
C-L350-5016-D	Fluorescent Angle	16 / 3	50	13	94	16 x 18 5/8 x 17"
C-L350-5016-E	Incandescent Light	16 / 3	50	13	94	16 x 18 5/8 x 17"
C-L350-5012-F	Duplex G.F.C.I	12 / 3	50	13	94	16 x 18 5/8 x 17"

## PC SERIES

- External heavy gauge CPC™ powder coated steel component cover for simple slip ring routine maintenance
- Single pedestal cord reel with space saving design facilitates workplace organization

\* Selection of electrical accessories

MODEL	EZ-Coil® Safety Line	ACCESSORY	AWG / NO. COND.	CORD FT.	AMPS	APRX. LBS.	W x H x L
PC13-5012-A	EZ-PC13-5012-A	Single receptacle	12 / 3	50	20	40	8 1/2 x 14 7/8 x 13 1/2"
PC13-5012-B	EZ-PC13-5012-B	Quad receptacle	12 / 3	50	20	41	8 1/2 x 14 7/8 x 13 1/2"
PC13-5016-C	EZ-PC13-5016-C	Fluorescent tube	16 / 3	50	0.3	37	8 1/2 x 14 7/8 x 13 1/2"
PC13-5016-D	EZ-PC13-5016-D	Fluorescent angle light	16 / 3	50	13	37	8 1/2 x 14 7/8 x 13 1/2"



## DEF SERIES & FUELING REELS

### FUEL SERIES

- Machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- Fuel dispensing hose designed to convey non-aromatic fuels including diesel, kerosene, fuel oil & heating oil

FUEL MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
SHF-N-525	EZ-SHF-525	3/4"	25	300	57	9 5/8 x 25 1/2 x 19 1/2"
TSHF-N-550	EZ-TSHF-525	3/4"	50	300	91	9 7/8 x 25 1/2 x 24"
TSHF-N-635	-	1"	35	300	95	10 x 25 1/2 x 24"
TSHF-N-650	-	1"	50	300	101	12 x 25 1/2 x 24"

### DEF SERIES

- Non-corrosive stainless steel 90° full-flow NPT swivel for Diesel Exhaust Fluid (DEF) dispensing applications
- Swivel Seals: VITON®
- DEF dispensing hose designed to convey the high-purity, aqueous urea solution DEF.

DEF MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
SH-N-525-DF-BBX	EZ-SH-N-525-DF-BBX	3/4"	25	300	57	8 1/4 x 21 1/4 x 24"
SH-N-550-DF-BBX	EZ-SH-N-550-DF-BBX	3/4"	50	300	76	9 7/8 x 25 1/2 x 24"
TSH-N-550-DF-BBX	EZ-TSH-N-550-DF-BBX	3/4"	50	300	91	9 7/8 x 25 1/2 x 24"



## SD SERIES

- Compact static discharge cable reel available in spring rewind or direct hand crank retraction
- Non corrosive stainless steel spring, pawl & zinc plated ratchet

MODEL	EZ-Coil® Safety Line	O.D.	FT.	APRX. LBS.	W x H x L
SD-50	EZ-SD-50	5/32"	50	20	3 7/8 x 11 1/2 x 11"
SD-100	EZ-SD-100	5/32"	100	32	4 x 15 x 14 1/2"



This selection only represents a sample of products applicable in this industry. Please visit us online or consult the factory for more product options.