

# Fire & SAFETY

## PROFESSIONAL GRADE FEATURES



**HEAVY DUTY SPUN DISCS WITH ROLLED EDGES** - not stamped, for greater strength, made with first of its kind CNC robotic spinning cell

**LOW PROFILE RISER & OPEN DRUM SLOT** for smooth, even hose wraps. Available with NST threading for fire hose

**ZINC PLATED STEEL SWIVEL**, swivel seals: AFLAS


**PERMANENTLY SEALED PILLOW BLOCK BEARINGS** for smooth rotation

**HIGH QUALITY STEEL CONSTRUCTION** with our durable CPC™ powder coat finish

**OPTIONAL EQUIPMENT: FRONT AND BACK MOUNT ROLLER GUIDES**

**ONE PIECE ALL CNC ROBOTICALLY WELDED steel "A" frame construction**

**CHOICE OF MOTOR**

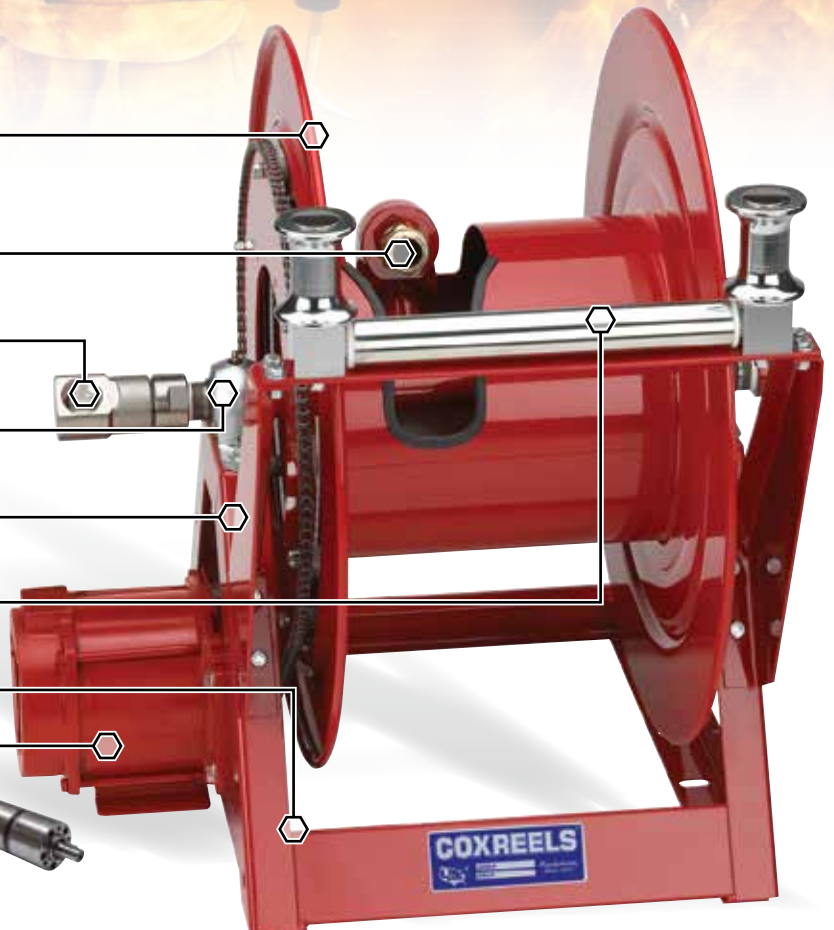

### POSSIBLE FIELDS OF APPLICATION

- Urban & Wildland Fire Interface
- Industrial Fire Protection
- Booster Hose
- Twin Agent / CAF Units
- Hydraulic Rescue Tools
- Breathing Air
- Skid Units
- Brush Trucks
- ATVs



[www.coxreels.com](http://www.coxreels.com)

800.COX.REEL

P: 480.820.6396

F: 480.820.5132

E: [info@coxreels.com](mailto:info@coxreels.com)



## 1125 SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Nickel plated steel swivel on 1" models)
- Swivel Seals: NITRILE (AFLAS on 1" models)
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap. All welded steel "A" frame construction for superior reel structure

MODEL	MOTOR OPTION	I.D.	FT.	PSI	APRX. LBS.	W x H x L
1125-5-100-RXXX	Electric Motor Options Available	¾"	100	3,000	42	26¾ x 18¾ x 17½"
1125-5-200-RXXX		¾"	200	3,000	55	38¾ x 18¾ x 17½"
1125-6-50-RXXX		1"	50	3,000	55	42¾ x 18¾ x 17½"
1125-6-100-RXXX		1"	100	3,000	69	32 x 18½ x 17½"



## SP-1125 SERIES

- Non-corrosive external fluid path with machined from high quality stainless steel 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE with Non-Toxic Food Grade Grease
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap

MODEL	MOTOR OPTION	I.D.	FT.	PSI	APRX. LBS.	W x H x L
1125-5-100-SP	Electric Motor Options available	¾"	100	3,000	42	26¾ x 18¾ x 17½"
1125-5-200-SP		¾"	200	3,000	55	38¾ x 18¾ x 17½"



## 1175 SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet
- Swivel Seals: AFLAS
- Exclusive low profile outlet riser, open drum slot design for flat smooth hose wrap. All welded steel "A" frame construction for superior reel structure

MODEL	MOTOR OPTION	I.D.	O.D.	FT.	PSI	APRX. LBS.	W x H x L
1175-6-50-RXXX	Electric Motor Options Available	1"	1 7/16"	50	3,000	67	24½ x 26½ x 24"
1175-6-100-RXXX		1"	1 7/16"	100	3,000	70	28½ x 26½ x 24"
1175-6-135-RXXX		1"	1 7/16"	135	3,000	70	36½ x 22 x 20"
1175-6-150-RXXX		1"	1 7/16"	150	3,000	75	32½ x 26½ x 24"
1175-6-200-RXXX	1"	1 7/16"	200	3,000	83	36½ x 26½ x 24"	



## SP-1175 SERIES

- Non-corrosive external fluid path with machined from high quality stainless steel 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE with Non-Toxic Food Grade Grease
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap

MODEL	MOTOR OPTION	I.D.	FT.	PSI	APRX. LBS.	W x H x L
1175-6-100-SP	Electric Motor Options Available	1"	100	3,000	70	28½ x 26½ x 24"
1175-6-200-SP		1"	200	3,000	83	36½ x 26½ x 24"



## 1185 SERIES

- External fluid path with in-line aluminium straight, full flow NPT swivel inlet
- Swivel Seals: NITRILE
- Exclusive low profile outlet riser, open drum slot design for flat smooth hose wrap. All welded steel "A" frame construction for superior reel structure

MODEL	MOTOR OPTION	I.D.	O.D.	FT.	PSI	APRX. LBS.	W x H x L
1185-1124-RXXX	Electric Motor Options Available	1 ½"	2 1/16"	50	600	76	25 x 26 x 24"
1185-1524-RXXX		1 ½"	2 1/16"	75	600	81	29 x 26 x 24"
1185-2024-RXXX		1 ½"	2 1/16"	100	600	94	33½ x 26 x 24"
1185-2528-RXXX		1 ½"	2 1/16"	150	600	122	38½ x 30 x 28"



## 1275 SERIES

- Two external fluid paths with machined from solid brass 90° full-flow NPT swivel inlets (one on each side of the reel)
- Swivel Seals: NITRILE. Electroless nickel plated steel swivel.
- Two low profile outlet risers & open drum slot design for dual hose applications.

MODEL	MOTOR OPTION	I.D.	O.D.	FT.	PSI	APRX. LBS.	W x H x L
1275-6-50-RXXX	Electric Motor Options Available	1 ½"	2 1/16"	50	600	76	25 x 26 x 24"
1275-6-75-RXXX		1 ½"	2 1/16"	75	600	81	29 x 26 x 24"
1275-6-100-RXXX		1 ½"	2 1/16"	100	600	94	33½ x 26 x 24"



## 1275HP SERIES

- Two high pressure 90° full-flow melanzed steel 1/4" swivel inlet
- Swivel Seals: TEFLON
- Two low profile outlet risers & open drum slot design for dual hose wrap. Sturdy all welded steel "A" frame, not bolted to strengthen the reel structure

MODEL	MOTOR OPTION	INLET	OUTLET	1/4" I.D.	3/8" I.D.	PSI	APRX. LBS.	W x H x L
1275HPL-4-8	Electric Motor Options Available	¼"	½"	135'	85'	10,000	76	17½ x 18½ x 17½"
1275HPL-4-12		¼"	½"	200'	125'	10,000	81	21½ x 18½ x 17½"



## PURE FLOW EZ-P & EZ-T SERIES

- Non-corrosive stainless steel air/fluid path with machined from high quality stainless steel 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE Non-Toxic Food Grade Grease
- Sturdy dual pedestal reel features Coxreels' exclusive Super Hub™ dual axle support system

MODEL	I.D.	FT.	PSI	APRX. LBS.	W x H x L
EZ-P-BLL-350	¾"	50	300	43	7½ x 18½ x 17½"
EZ-P-BHL-350	¾"	50	6,000	43	7½ x 18½ x 17½"
EZ-T-BLL-3100	¾"	50	300	85	9½ x 25½ x 24"
EZ-T-BHL-3100	¾"	50	6,000	85	9½ x 25½ x 24"



## PURE FLOW 1125 SERIES

- Non-corrosive stainless steel air/fluid path with machined from high quality stainless steel 90° full-flow NPT swivel inlet
- Swivel Seals: NITRILE Non-Toxic Food Grade Grease
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap

MODEL	I.D.	FT.	PSI	APRX. LBS.	W x H x L
1125P-4-6	½"	100	6,000	36	19¾ x 18½ x 17½"
1125P-4-8	½"	150	6,000	37	21¾ x 18½ x 17½"
1125P-4-12	½"	200	6,000	39	25¾ x 18½ x 17½"

### CHOICE OF MOTORS



This selection only represents a sample of products applicable in this industry. Please visit us online or consult the factory for more product options.