


FEATURE FOCUS MOTORIZED CORD REEL

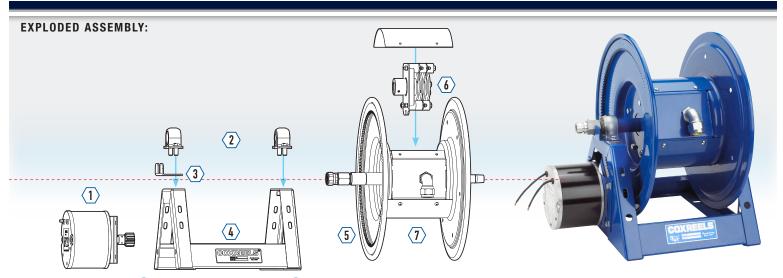

FEATURES &

STEEL CONSTRUCTION

High-Quality steel construction provides superior strength and durability for heavy-duty applications in commercial and industrial settings.



POWDER COAT

CPC™ Powder Coat. Long lasting, chip resistant and rust inhibiting CPC™ powder coat finish seals all steel components for maximum corrosion resistance.



CHOICE OF MOTOR

Customize reel to specific application:

| Motor A | Air - #4 gast comp. air motor | 8 lbs |
|----------|--|--------|
| Motor E | Elec 12v DC 1/3 HP rew. rev. type | 13 lbs |
| Motor EF | Elec 24v DC 1/3 HP rew. rev. type | 13 lbs |
| Motor EB | Elec 24v DC 1/2 HP rew. rev. type | 26 lbs |
| Motor ED | Elec Expl. prf 12v DC 1/2 HP rew. rev. type | 26 lbs |
| Motor EA | Elec Expl. Prf 115v 1/2 HP rew., AC rev. type | 26 lbs |
| Motor H | Hydraulic end ported 9/16-18 UNF rev. | 6 lbs |
| Motor C | Front hand crank bevel geared crank | 3 lbs |



"A" Frame

Sturdy one piece, all CNC robotically welded 1/4" steel "A" frame base, not bolted, for superior reel structure and narrow width for convenient installation in restricted spaces

Mounting Pattern - Mounting pattern located in the steel base for easy reel installation and detachment.



DIRECT DRIVE MOTOR

A solid steel halo is welded to the disc for a safe and reliable direct gear drive retraction on 1125 and 1275 Series.

- Lubricated chain and zinc plated steel sprocket on larger motorized 1175, 1185 and 1195 Series.



SLIP RING ASSEMBLY

Drum-located slip ring assembly with easy to access removable panel for simple routine maintenance.

- Available with 30AMP or 45AMP, 600V rated slip ring assembly.



CNC SPUN DISC

Heavy duty CNC robotically spun and ribbed discs with rolled edges for greater strength, durability, cord protection and operator safety.



EB. ED.

PILLOW BLOCK BEARINGS

Pillow Block Bearings - Sturdy permanently lubricated and self-aligning pillow block bearings for smooth rotation and trouble-free operation.

- Robust lubricated horizontal surface mount bearings on 1-1/2" and 2" hose I.D models.



Cable Keeper .

Integrated anti-rotation cable keeper prevents the 5 foot lead cable from whipping or twisting.





SPEED

CONTROLLER





www.coxreels.com

800.COX.REEL P: 480.820.6396 F: 480.820.5132

E: info@coxreels.com