

Power TRANSMISSION

PROFESSIONAL GRADE FEATURES



ADJUSTABLE SOLID RUBBER HOSE STOP for lead length positioning

VERSATILE GUIDE ARM adjusts to wall, floor, ceiling & vehicle mounting

EXTERNAL FLUID PATH WITH DUAL PORT MELANIZED 90° FULL-FLOW NPT SWIVEL that screws directly on 1" solid steel axle, for simple seal maintenance and fast and easy hose installation


HIGH QUALITY STEEL CONSTRUCTION with our durable CPC™ powder coat finish

HEAVY DUTY SPUN DISCS WITH ROLLED EDGES - not stamped, for greater strength, made with first of its kind CNC robotic spinning cell

ENCLOSED FACTORY TUNED AND MATCHED CARTRIDGE-STYLE SPRING MOTOR, easily removed for safe & convenient replacement

HEAVY GAUGE 1/4" STAINLESS STEEL BASE & SUPPORT POST for maximum stability

DUAL AXLE SUPPORT WITH SUPER HUB™ increased reel strength for more demanding applications

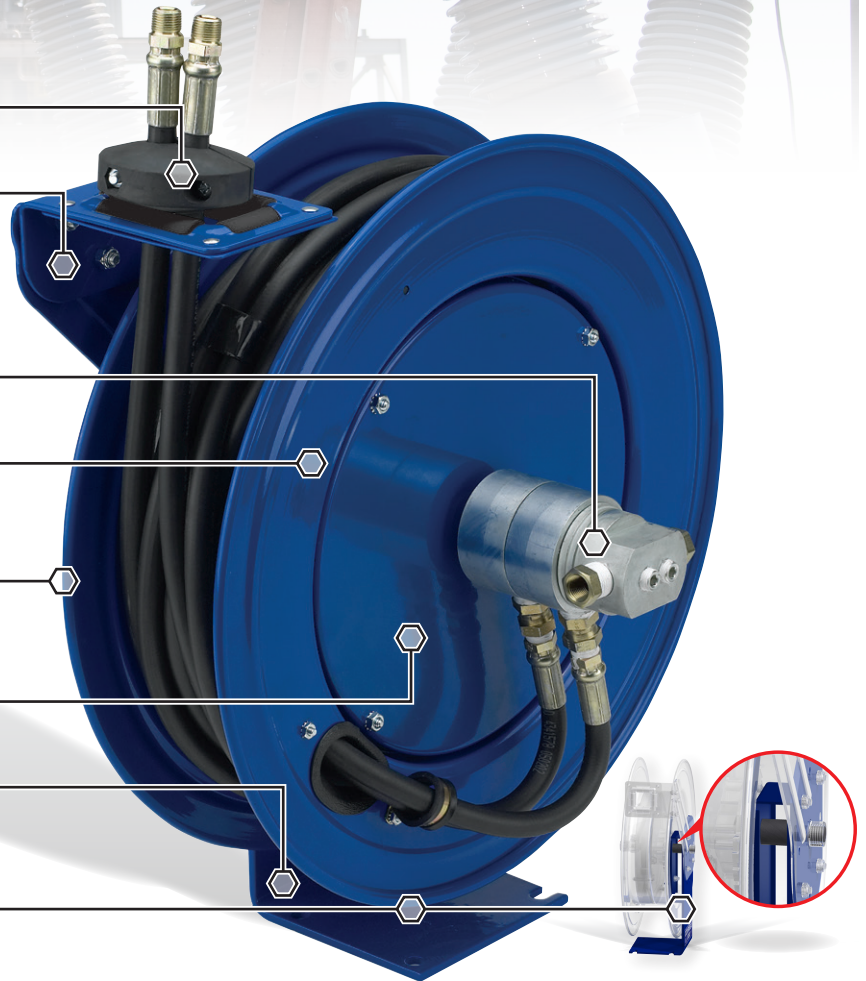

POSSIBLE FIELDS OF APPLICATION

- Maintenance / Repair & Operations
- General Industrial
- Pneumatic Tools
- Power Tools
- Light Sources
- Hydraulics
- Lubrication
- Washdown



www.coxreels.com

800.COX.REEL

P: 480.820.6396

F: 480.820.5132

E: info@coxreels.com

Power Transmission



P SERIES

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy single pedestal spring driven reel with space saving design facilitates workplace organization
- Available in Medium & High Pressure

MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
P-LP-125	EZ-P-LP-125	1/4"	25	300	27	5 7/8 x 14 7/8 x 13 1/2"
P-LP-150	EZ-P-LP-150	1/4"	50	300	40	6 3/4 x 18 5/8 x 17 1/8"
P-LP-325	EZ-P-LP-325	3/8"	25	300	28	6 1/2 x 14 7/8 x 13 1/2"
P-LP-350	EZ-P-LP-350	3/8"	50	300	43	6 3/4 x 18 5/8 x 17 1/8"
P-LP-425	-	1/2"	25	300	44	7 x 18 5/8 x 17 1/8"
P-LP-450	EZ-P-LP-450	1/2"	50	300	48	7 x 18 5/8 x 17 1/8"



SH, MP & HP SERIES - EQUIPPED WITH SUPER HUB™

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy single pedestal spring driven reel features Coxreels' exclusive Super Hub™ dual axle support system



MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
SH-N-350	EZ-SH-350	3/8"	50	300	50	8 1/4 x 21 1/4 x 19 1/2"
SH-N-375	EZ-SH-375	3/8"	75	300	68	8 1/4 x 21 1/4 x 24"
SH-N-450	EZ-SH-450	1/2"	50	300	54	8 1/4 x 21 1/4 x 19 1/2"
SH-N-475	EZ-TSH-475	1/2"	75	300	68	8 3/4 x 25 1/2 x 24"
MP-N-350	EZ-MP-350	3/8"	50	3,000	65	8 1/4 x 21 1/4 x 19 1/2"
MP-N-450	EZ-MP-450	1/2"	50	2,500	67	8 3/4 x 25 1/2 x 19 1/2"
HP-N-150	EZ-HP-150	1/4"	50	5,000	64	8 3/4 x 25 1/2 x 19 1/2"
HP-N-350	EZ-HP-350	3/8"	50	4,000	65	9 1/4 x 25 1/2 x 19 1/2"



T SERIES - EQUIPPED WITH SUPER HUB™

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Zinc plated steel swivel on HP models)
- Swivel Seals: NITRILE
- Sturdy dual pedestal reel features Coxreels' exclusive Super Hub™ dual axle support system



MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
TSH-N-350	EZ-TSH-350	3/8"	50	300	61	9 3/8 x 21 1/4 x 19 1/2"
TSH-N-375	EZ-TSH-375	3/8"	75	300	82	9 3/8 x 25 1/2 x 24"
TSH-N-3100	EZ-TSH-3100	3/8"	100	300	85	9 3/8 x 25 1/2 x 24"
TSH-N-450	EZ-TSH-450	1/2"	50	300	63	9 3/8 x 21 1/4 x 19 1/2"
TSH-N-475	EZ-TSH-475	1/2"	75	300	82	9 3/8 x 25 1/2 x 24"
TSH-N-4100	EZ-TSH-4100	1/2"	100	300	95	9 3/8 x 25 1/2 x 24"
TMP-N-350	EZ-TMP-350	3/8"	50	3,000	74	9 3/8 x 21 1/4 x 19 1/2"
TMP-N-450	EZ-TMP-450	1/2"	50	2,500	77	9 3/8 x 21 1/4 x 19 1/2"
THP-N-150	EZ-THP-150	1/4"	50	5,000	74	9 3/8 x 21 1/4 x 19 1/2"
THP-N-350	EZ-THP-350	3/8"	50	4,000	78	9 3/8 x 21 1/4 x 19 1/2"



MPD & TDMP SERIES

- External fluid path with dual port melanized 90° full-flow NPT swivel inlet
- Swivel Seals: TEFLON
- One-sided supply/return hookup

MODEL	I.D.	FT.	PSI	APRX. LBS.	W x H x L
MPD-N-330	3/8"	30	3,000	78	11 1/2 x 21 1/8 x 19 1/2"
MPD-N-430	1/2"	30	2,500	79	11 1/2 x 21 1/8 x 19 1/2"
TDMP-N-350	3/8"	50	3,000	104	11 5/8 x 18 5/8 x 17 5/8"
TDMP-N-450	1/2"	50	2,500	106	11 5/8 x 18 5/8 x 17 5/8"



1275HP SERIES

- Designed for dual hydraulic emergency rescue systems & other high pressure hydraulic tools
- External fluid path with dual port melanized 90° full-flow NPT swivel inlet
- Swivel Seals: VITON®

MODEL	INLET	OUTLET	1/4 CAPACITY	1/2 CAPACITY	PSI	APRX. LBS.	W x H x L
1275HPL-4-8	1/4"	1/2"	135'	85'	10,000	37	18 3/8 x 18 1/8 x 17"
1275HPL-4-8-E	1/4"	1/2"	135'	85'	10,000	68	22 3/8 x 18 1/8 x 17"
1275HPL-4-12-E	1/4"	1/2"	200'	125'	10,000	70	26 3/8 x 18 1/8 x 17"



PC SERIES

- External heavy gauge CPC™ powder coated steel component cover for simple slip ring routine maintenance
- Single pedestal cord reel with space saving design facilitates workplace organization
- Choice of electrical accessory



MODEL	EZ-Coil® Safety Line	ACCESSORY	AWG / NO. COND.	CORD FT.	AMPS	APRX. LBS.	W x H x L
PC13-5012-A	EZ-PC13-5012-A	Single receptacle	12 / 3	50	20	40	8 1/2 x 14 7/8 x 13 1/2"
PC13-5016-A	EZ-PC13-5016-A	Single receptacle	16 / 3	50	13	36	8 1/2 x 14 7/8 x 13 1/2"
PC13-5012-B	EZ-PC13-5012-B	Quad receptacle	12 / 3	50	20	41	8 1/2 x 14 7/8 x 13 1/2"
PC13-5016-C	EZ-PC13-5016-C	Fluorescent tube	16 / 3	50	0.3	37	8 1/2 x 14 7/8 x 13 1/2"
PC13-5016-D	EZ-PC13-5016-D	Fluorescent angle light	16 / 3	50	13	37	8 1/2 x 14 7/8 x 13 1/2"
PC13-5016-E	EZ-PC13-5016-E	Incandescent cage light	16 / 3	50	13	36	8 1/2 x 14 7/8 x 13 1/2"
PC13-5012-F	EZ-PC13-5012-F	G.F.C.I. receptacle	16 / 3	50	13	38	8 1/2 x 14 7/8 x 13 1/2"



P-W & SHW SERIES

- External fluid path with 90° full-flow dual ported brass swivel offering both connections from the same side of the reel
- Single pedestal reel with space saving design facilitates workplace organization
- Designed for Oxy-Acetylene or "T" grade welding hose

MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
P-W-125	EZ-P-W-125	1/4"	25	200	46	8 1/2 x 18 5/8 x 17"
SHW-N-150	EZ-SHW-150	1/4"	50	200	64	10 1/4 x 21 1/4 x 19 1/2"
SHW-N-1100	EZ-SHW-1100	1/4"	100	200	84	10 1/4 x 25 1/2 x 24"
P-WT-125	EZ-P-WT-125	1/4"	25	200	46	8 1/2 x 18 5/8 x 17"
SHWT-N-150	EZ-SHWT-150	1/4"	50	200	64	10 1/4 x 21 1/4 x 19 1/2"
SHWT-N-1100	EZ-SHWT-1100	1/4"	100	200	84	10 1/4 x 25 1/2 x 24"



P-WC SERIES

- External, easily accessible heavy gauge CPC™ powder coated steel components cover for simple slip ring routine maintenance
- Electrical current runs through a 450 AMP rated slip ring
- Designed for electrode & grounding lead applications (Each lead requires an individual reel)

MODEL	FT.	TYPE	VOLT	AMPS.	APRX. LBS.	W x H x L
P-WC17-5002	50	2ga	600	225	56	11 x 18 1/4 x 17 1/4"
P-WC17-5001	50	1ga	600	300	60	11 x 18 1/4 x 17 1/4"
P-WC17-5020	50	2/0	600	450	68	11 x 18 1/4 x 17 1/4"
P-WC17-5010	50	1/0	600	350	64	11 x 18 1/4 x 17 1/4"

This selection only represents a sample of products applicable in this industry. Please visit us online or consult the factory for more product options.