

DUAL HIGH CAPACITY HOSE REELS DP SERIES

COXREELS® DP Series “Dual Product Delivery” spring driven hose reels have two swivel inlets and two outlets for dual hose applications. Like the SP Series they are built to handle large hose diameters used in applications demanding large volume delivery in low and medium pressures. The sturdy box-style frame has heavy duty steel cross supports to all four corners for extra strength and rigidity.

LOW PRESSURE

Two swivel joint inlets and two outlet risers to simultaneously handle equal lengths of two hoses. Hoses can be different diameters, in which case the larger hose diameter determines capacity of the reel. For applications 21 BAR and temperatures to 120° C. **NOTE: Do not exceed listed hose O.D. to obtain maximum length.**

MODEL	HOSE						LESS HOSE		SIZE INDEX
	I.D. mm	O.D. mm	LENGTH m	BAR	INLET/OUTLET N.P.T. mm	Kg.	MODEL	Kg.	
Please consult factory for reels with hose	10	19	15	21	13	-	DLPL-350	43	1
	10	19	23	21	13	-	DLPL-375	52	1
	10	19	30	21	13	-	DLPL-3100	53	2
	13	22	15	21	13	-	DLPL-450	44	1
	13	22	23	21	13	-	DLPL-475	47	2
	13	22	30	21	13	-	DLPL-4100	63	3
	19	32	8	21	19	-	DLPL-525	42	4
	19	32	15	21	19	-	DLPL-550	45	5

MEDIUM PRESSURE


Two swivel joint inlets and two outlet risers to simultaneously handle equal lengths of two hoses. Hoses can be different diameters, in which case the larger hose diameter determines capacity of the reel. For applications 207 BAR and temperatures to 120° C. For higher temperatures and pressures, see price sheet or consult factory. **NOTE: Do not exceed listed hose O.D. to obtain maximum length.**

MODEL	HOSE						LESS HOSE		SIZE INDEX
	I.D. mm	O.D. mm	LENGTH m	BAR	INLET/OUTLET N.P.T. mm	Kg.	MODEL	Kg.	
Please consult factory for reels with hose	10	21	15	207	13	-	DMPL-350	45	1
	10	21	23	207	13	-	DMPL-375	58	1
	10	21	30	207	13	-	DMPL-3100	54	2
	13	24	15	207	13	-	DMPL-450	46	1
	13	24	23	207	13	-	DMPL-475	52	2
	13	24	30	207	13	-	DMPL-4100	63	3

REEL DIMENSIONS

Technical Data Sheets Available On Website

SIZE INDEX	W mm	H mm	L mm	X mm	Y mm	Ø mm	Dw mm
1	546	521	581	391	546	267	191
2	546	622	670	391	635	267	191
3	546	724	772	391	737	267	191
4	606	521	581	391	546	267	191
5	606	622	670	391	635	267	191

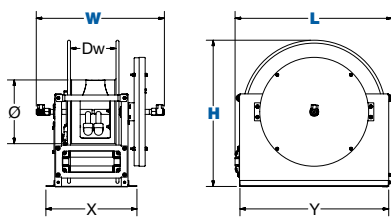

COXREELS® ACCESSORY



Top Rewind 4-Way Roller Bracket for SP & DP Series FOR CEILING, WALL OR FLOOR MOUNT APPLICATIONS
4-way enclosed pinch-proof stainless steel rollers are 1" in diameter supported by powder coated steel brackets. Specify ceiling mount & specify drum width. Weight: 5 Kg.
For 10 - 19 mm - 20458 & 8100 For 25 - 38 mm - 20458 & 8101



DP SERIES :: REEL SPECIFICATIONS

SWIVEL

- Two external fluid paths with machined from solid brass 90° full-flow NPT swivel inlets
- Swivel Seals: NITRILE

DESIGN & STRUCTURE

- Sturdy box-style frame design with two inlets & two outlets to handle dual hose applications
- Low profile outlet riser & open drum slot design for even hose wrap
- Reel adjusts to wall, floor, vehicle & overhead positions with optional roller bracket
- Heavy gauge 6 mm steel base for maximum strength
- Reinforced steel frame provides maximum strength & stability
- Long lasting self-lubricated flange bearings for smooth rotation
- Heavy duty 25 mm stainless steel pinch-proof rollers

RETRACTION

- Enclosed factory tuned & matched cartridge-style spring motor
- Non corrosive stainless steel pawl spring
- Cast iron lock ring with non-sparking bronze pawl
- Multi-position lock ratchet mechanism secures hose at desired length

SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

POSSIBLE FIELDS OF APPLICATION

- Hydraulics
- Hydrant Dispenser
- Twin Agent Applications
- Chemical Fluid Transfer

ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Roller Brackets
- Hoses
- Assorted Reel Accessories

